


Ø55mm (Cut out)



h(m)	E(lx)	D(mm)
1.0	1586	410
2.0	397	820
3.0	176	1230

General Data

Item No.	MS-GM-COMPASS 65 RE-RA
Power.	6 Watt
LED Type	COB
Luminous flux	370 - 390 lm
CCT	2700K , 3000K , 4000K
Beam angle	23°
CRI	> 90
Dimension	Ø65 mm x 68 mm
Color	White , Gray , Black
Material	Die-cast Aluminum
Mounting Method	-
Net weight	-
Warranty	2 Years

Electrical Data

Input voltage	DC 24V
Frequency	-
Control	Driver / power supply
Dimming	Dimmable 1-10V , PHASE , DAIL
Cable	Rubber cable 0.5M H05RN-F
Driver	Built-in high voltage constant current driver

Construction Data

IP Rate	IP20
IK Rate	-

Accessories & Optional

Reflector







Accessory



PASSIVATED

2 YEARS WARRANTY

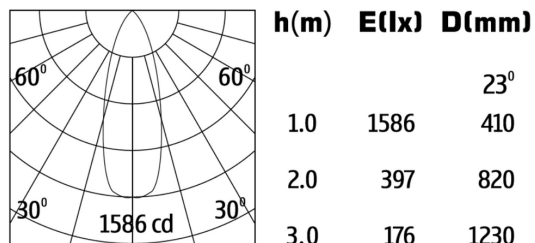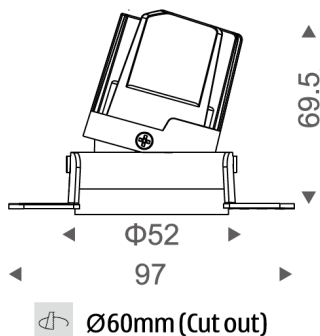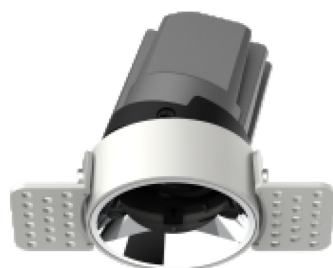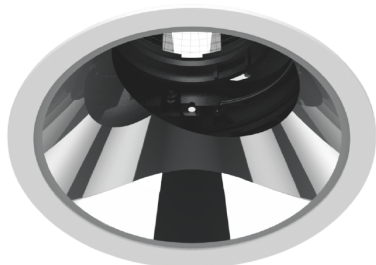

General Data

Item No.	MS-GM-COMPASS 65 RE-RA
Power.	6 Watt
LED Type	COB
Luminous flux	370 - 390 lm
CCT	2700K , 3000K , 4000K
Beam angle	23°
CRI	> 90
Dimension	Ø52 mm x 69.5 mm
Color	White , Gray , Black
Material	Die-cast Aluminum
Mounting Method	-
Net weight	-
Warranty	2 Years

Electrical Data

Input voltage	DC 24V
Frequency	-
Control	Driver / power supply
Dimming	Dimmable 1-10V , PHASE , DAIL
Cable	Rubber cable 0.5M H05RN-F
Driver	Built-in high voltage constant current driver

Construction Data

IP Rate	IP20
IK Rate	-

Accessories & Optional

Reflector






Accessory




PASSIVATED

2 YEARS WARRANTY

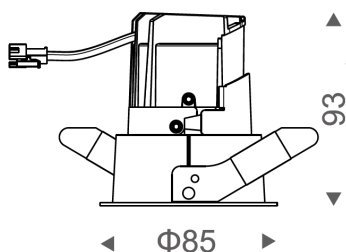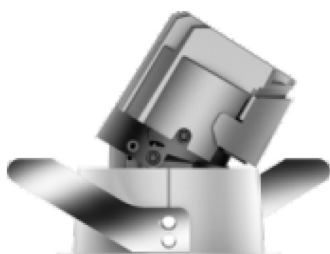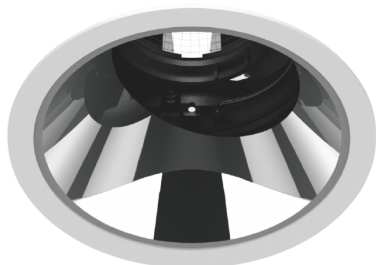

Ø75mm (Cut out)

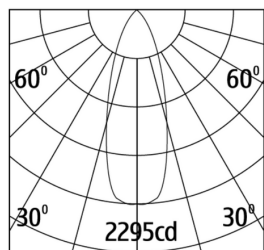

h(m)	E(lx)	D(mm)
1.0	2295	470
2.0	570	950
3.0	523	1042

General Data

Item No.	MS-GM-COMPASS 85 RE-RA
Power.	12 Watt
LED Type	COB
Luminous flux	530 - 570 lm
CCT	2700K , 3000K , 4000K
Beam angle	25°
CRI	> 90
Dimension	Ø85 mm x 93 mm
Color	White , Gray , Black
Material	Die-cast Aluminum
Mounting Method	-
Net weight	-
Warranty	2 Years

Electrical Data

Input voltage	DC 24V
Frequency	-
Control	Driver / power supply
Dimming	Dimmable 1-10V , PHASE , DAIL
Cable	Rubber cable 0.5M H05RN-F
Driver	Built-in high voltage constant current driver

Construction Data

IP Rate	IP20
IK Rate	-

Accessories & Optional

Reflector






Accessory




PASSIVATED

2 YEARS WARRANTY

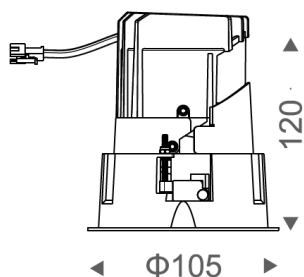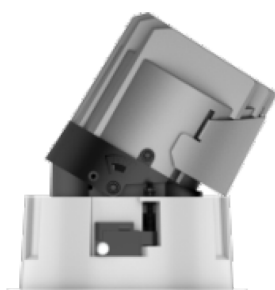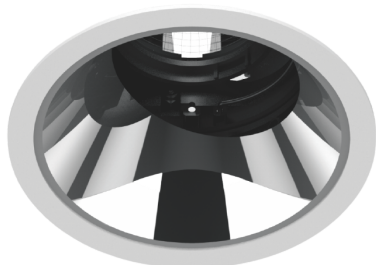

Ø95mm (Cut out)

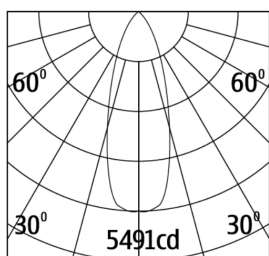

h(m)	E(lx)	D(mm)
1.0	5491	440
2.0	1373	870
3.0	610	1310

General Data

Item No.	MS-GM-COMPASS 105 RE-RA
Power.	20 Watt
LED Type	COB
Luminous flux	1150 - 1250 lm
CCT	2700K , 3000K , 4000K
Beam angle	25°
CRI	> 90
Dimension	Ø105 mm x 120 mm
Color	White , Gray , Black
Material	Die-cast Aluminum
Mounting Method	-
Net weight	-
Warranty	2 Years

Electrical Data

Input voltage	DC 24V
Frequency	-
Control	Driver / power supply
Dimming	Dimmable 1-10V , PHASE , DAIL
Cable	Rubber cable 0.5M H05RN-F
Driver	Built-in high voltage constant current driver

Construction Data

IP Rate	IP20
IK Rate	-

Accessories & Optional

Reflector






Accessory




PASSIVATED

2 YEARS WARRANTY

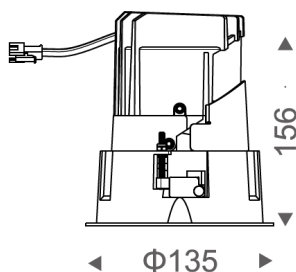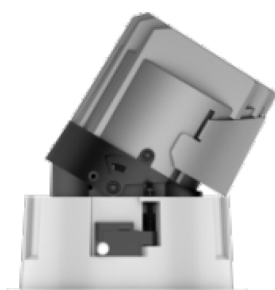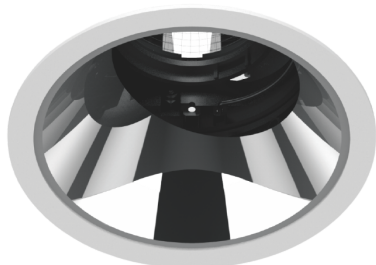

Ø125mm (Cut out)

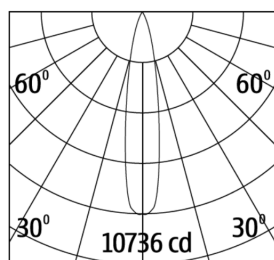

h(m)	E(lx)	D(mm)
1.0	10736	380
2.0	2684	760
3.0	1193	1150

General Data

Item No.	MS-GM-COMPASS 135 RE-RA
Power.	30 Watt
LED Type	COB
Luminous flux	1800 - 1950 lm
CCT	2700K , 3000K , 4000K
Beam angle	22°
CRI	> 90
Dimension	Ø135 mm x 156 mm
Color	White , Gray , Black
Material	Die-cast Aluminum
Mounting Method	-
Net weight	-
Warranty	2 Years

Electrical Data

Input voltage	DC 24V
Frequency	-
Control	Driver / power supply
Dimming	Dimmable 1-10V , PHASE , DAIL
Cable	Rubber cable 0.5M H05RN-F
Driver	Built-in high voltage constant current driver

Construction Data

IP Rate	IP20
IK Rate	-

Accessories & Optional

Reflector



Accessory



PASSIVATED

2 YEARS WARRANTY